


940nm 2W VCSEL Laser Chip

Part No.: D-V0940M-2000-0040

Suitable for pulse power applications and the power is 2W

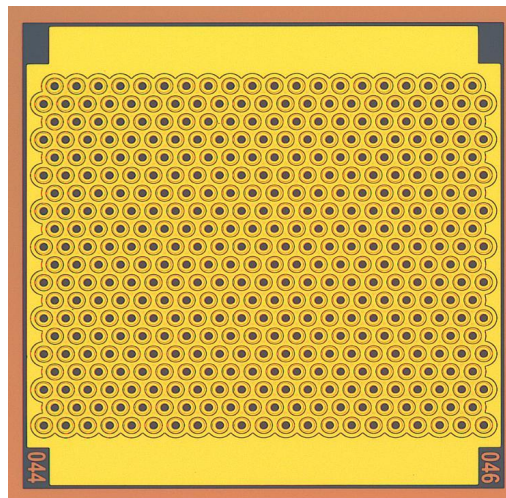


Features

- VCSEL (Vertical-Cavity Surface-Emitting Laser)
- High efficiency and reliability
- Stable central wavelength, narrow line width
- Doughnut shaped, symmetrical far field
- Surface mountable



Applications

- Sensor light source
- Consumer electronic products
- Machine vision
- Red lighting
- Industrial

L-I-V Curve

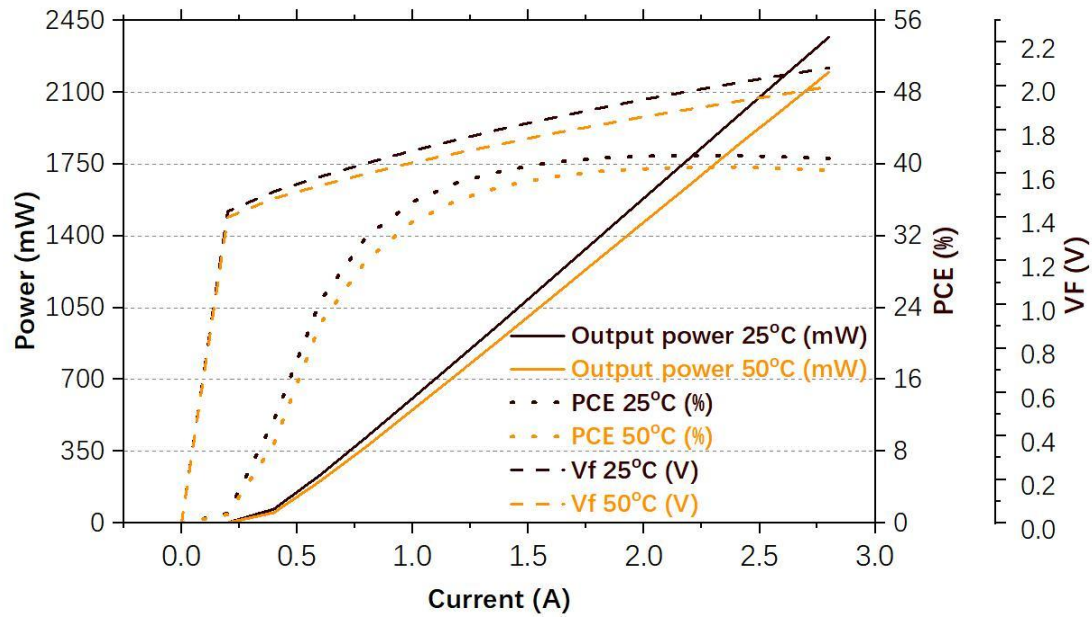

FFDA (Far-Field Divergence Angle)

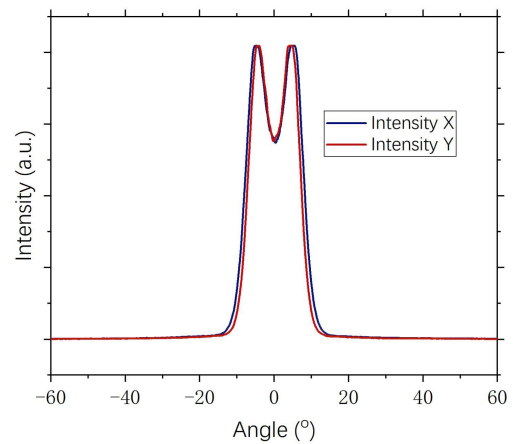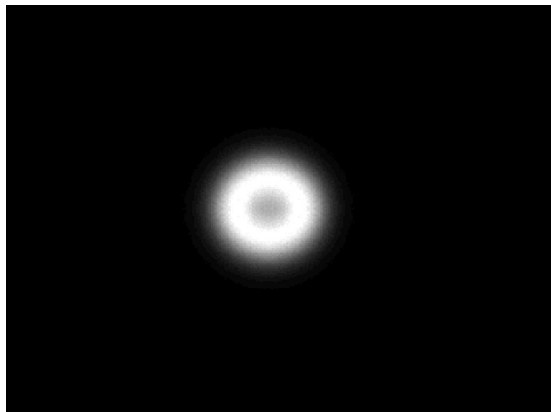

Electrical Optical Characteristics

Parameter	Symbol	Unit	Min.	Typ.	Max	Note
Threshold Current	I _{th}	mA	--	400	550	
Forward Voltage	V _F	V	1.9	2.1	2.3	IF = 2.8A
Differential Resistance	R _s	Ohms	--	0.2	--	
Slop Efficiency	SE	W/A	0.9	1.0	--	
Output Power	P _{op}	mW	2000	2200	--	IF = 2.8A
Power Conversion Efficiency	PCE	%	37	39	--	IF = 2.8A
Wavelength	λ _{op}	nm	930	940	950	
Divergence Angle(1/e ²)		deg	18	21	24	IF = 2.8A


25°C, QCW Model (Pulse length 0.5ms, 1% Duty Cycle)

May 2022

The details in this document may subject to change without prior notice.

Email:info@deraysemi.com
DE-RAY Optoelectronics Co., Ltd.
All Rights Reserved

Mechanical Specifications

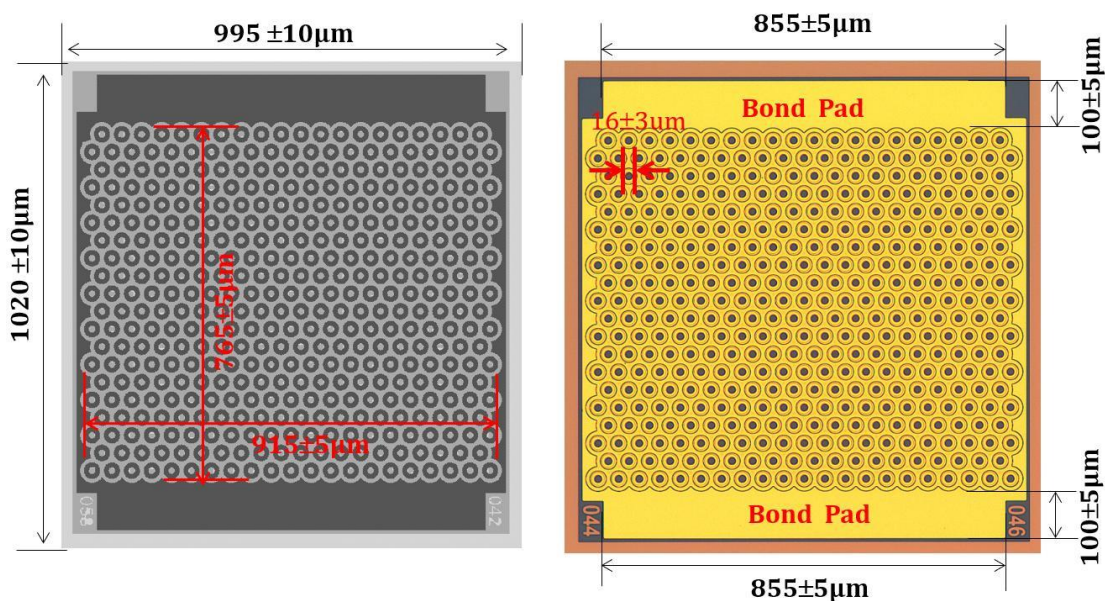

参数 Parameter	规格 Specification
芯片尺寸 Die size	995±10μm x 1020±10μm
芯片厚度 Die Thickness	150±10μm
光孔数目 Number of Emitters	410
焊盘尺寸（正极） Bond Pad Size (Anode Pad)	100±10μm x 855±10μm x 2
背面电极尺寸（负极） Back Electrode Size (Cathode Pad)	995±10μm x 1020±10μm

